

Скенери Beta POS (SO-800, SO2100, SO1100)


Set all defaults





1. Start Configuration




2. Prefix

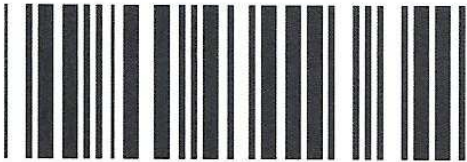

3. Program STX

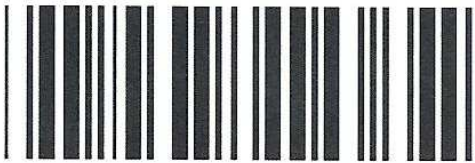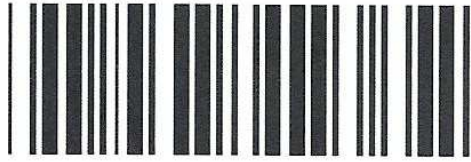

4. Confirm

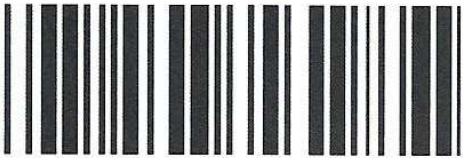

5. End configuration

